

RESOLVENDO O PROBLEMA DE AUTENTICAÇÃO NO INTERNET EXPLORER 7


*Obs: Só é necessário efetuar este procedimento abaixo para internet explorer versão 7.0

- 1- Como descobrir a versão de seu Internet Explorer.
- 2- Abra o Internet Explorer, clique em Ajuda e depois em Sobre o Internet Explorer.




Esse tutorial deve ser utilizado quando voce troca a senha padrão ou o usuário padrão de seu modem e não consegue mais acessar o modem via Internet Explorer 7

Abra o MS-DOS e digite "telnet 192.168.1.254" e pressione a tecla enter.

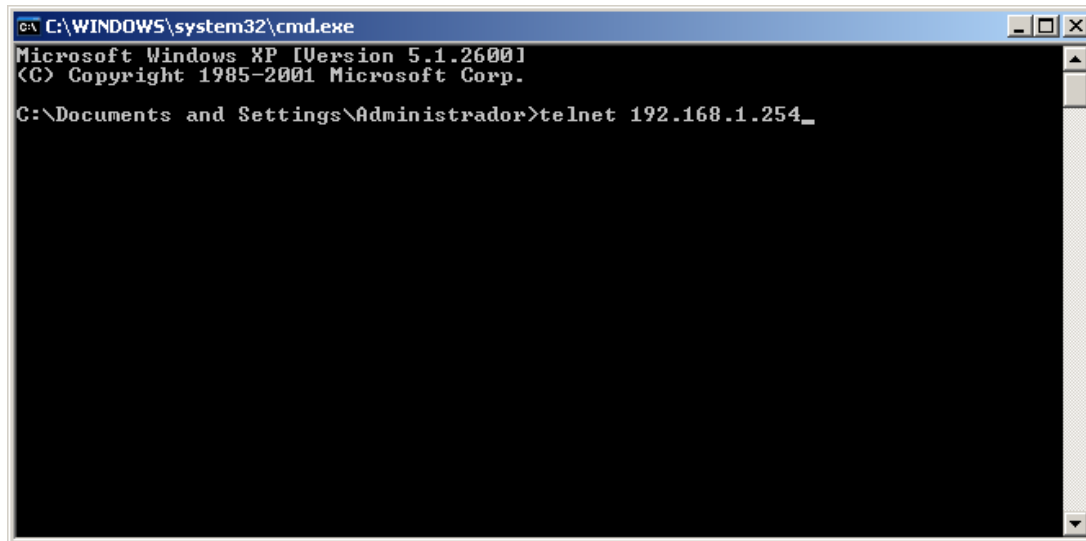

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\Administrador>telnet 192.168.1.254_
```

Será solicitado username e password, digite-os e pressione enter.

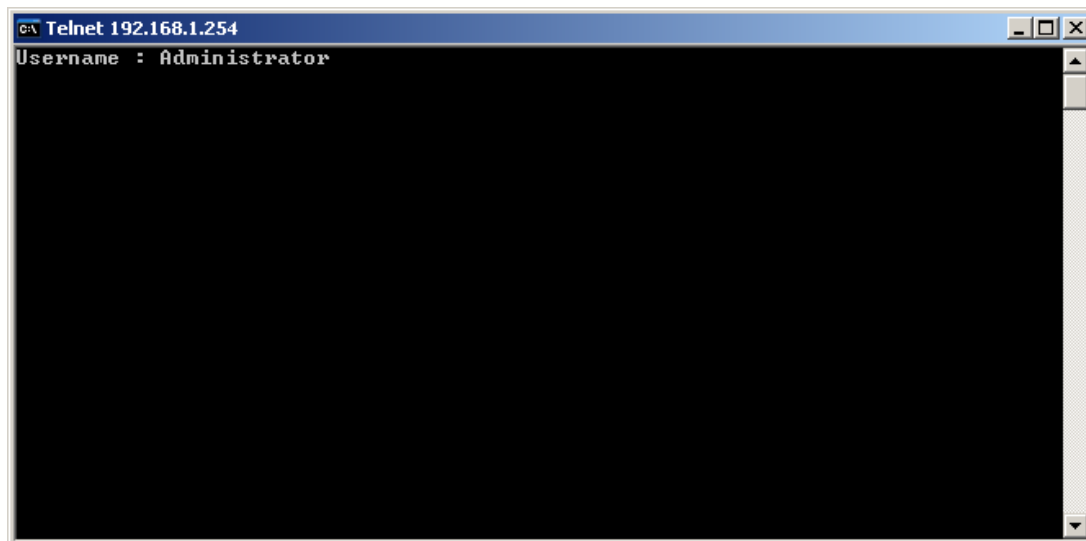

```
C:\ Telnet 192.168.1.254
Username : Administrator
```

Abrirá a tela abaixo.

```
C:\ Telnet 192.168.1.254
SpeedTouch 510
5.4.0.13
Copyright (c) 1999-2005, THOMSON

<Administrator>=
```


Digitare "system config digestauth=disabled" e pressione enter.

A screenshot of a Telnet session window titled "c:\ Telnet 192.168.1.254". The window displays the boot screen of a SpeedTouch 510 device. The screen shows the text "SpeedTouch 510", "5.4.0.13", and "Copyright (c) 1999-2005, THOMSON". Below this text is a large, stylized logo consisting of a complex, interconnected pattern of lines forming a diamond-like shape. At the bottom of the screen, a dashed line separates the boot screen from the command prompt. The prompt is "<Administrator>=>system config digestauth=disabled_".

Digite "saveall" e pressione enter.

A screenshot of a Telnet session window titled "c:\ Telnet 192.168.1.254". The window displays the same boot screen as the previous image, including the text "SpeedTouch 510", "5.4.0.13", and "Copyright (c) 1999-2005, THOMSON", and the stylized logo. Below the dashed line, the command prompt shows the command "system config digestauth=disabled" followed by the user input "saveall".

Digite “exit” e pressione enter. Agora voce já pode adicionar uma senha ao usuário Administrator de seu Speedtouch.

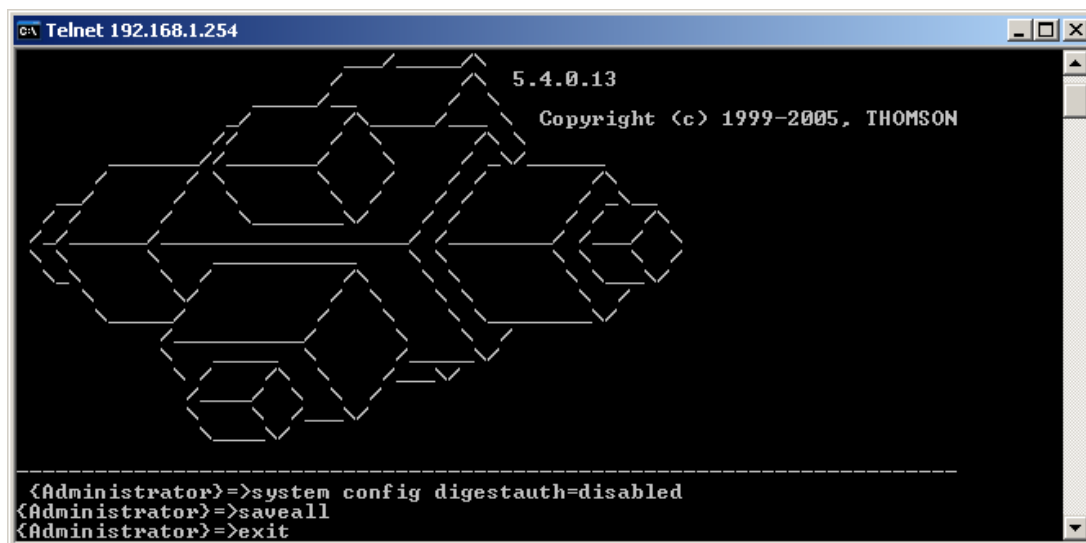

```
c:\ Telnet 192.168.1.254
5.4.0.13
Copyright (c) 1999-2005, THOMSON

-----
<Administrator>=>system config digestauth=disabled
<Administrator>=>saveall
<Administrator>=>exit
```