


## Troca do Servidor DNS no modem ST510v6 Firmware 5.4.0.13/5.4.0.15

Abra o MS-DOS e digite telnet 192.168.1.254 e pressione enter, será solicitado Username

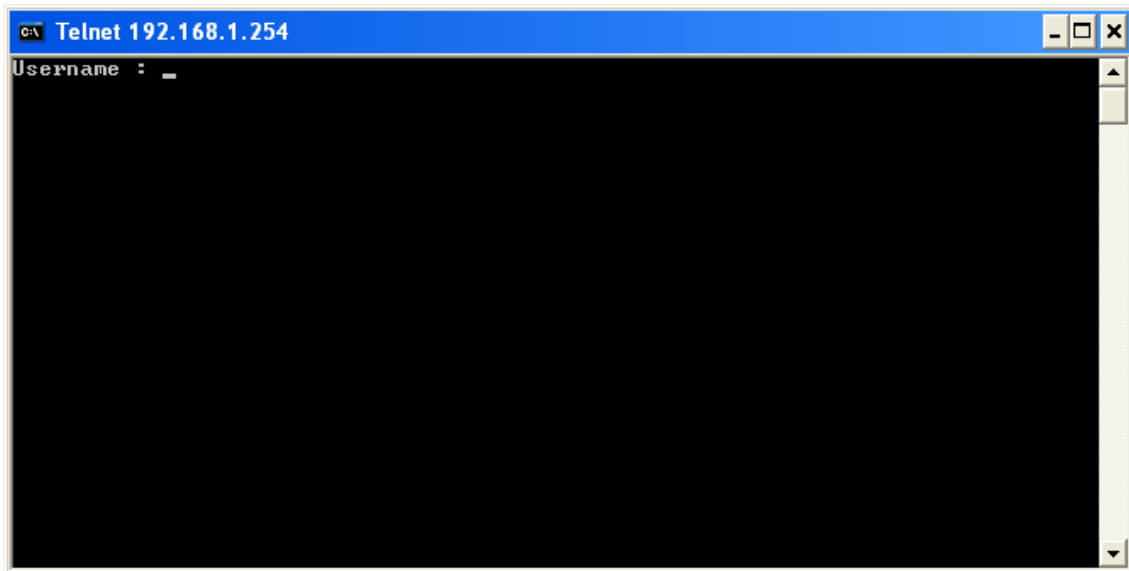


```

c:\ Telnet 192.168.1.254
Username : _

```

Digite "Administrator" e pressione a tecla enter.

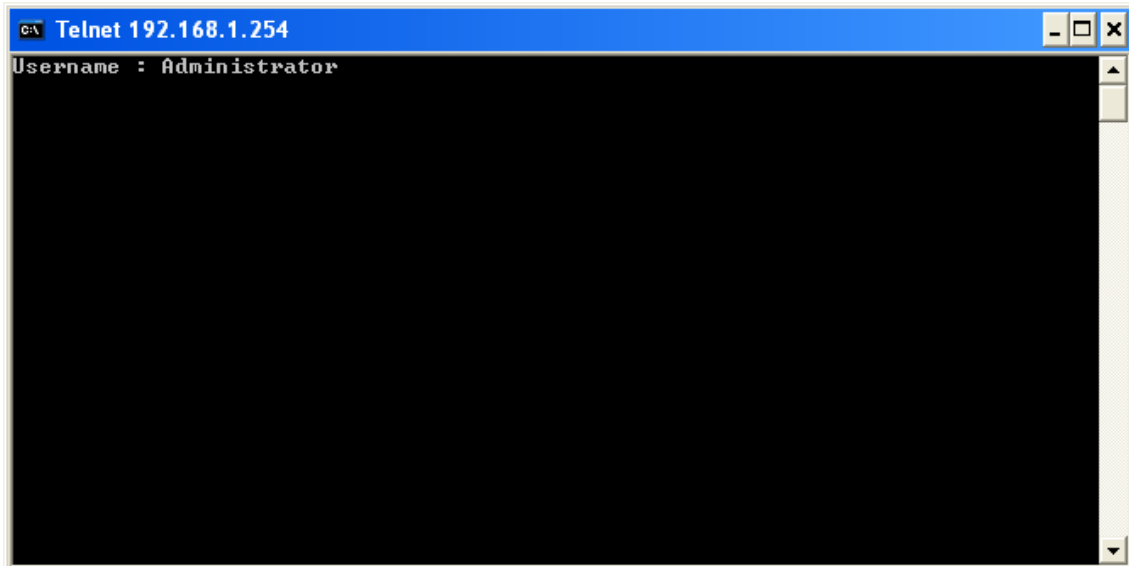


```


c:\ Telnet 192.168.1.254
Username : Administrator

```

**Abrirá a tela abaixo.**

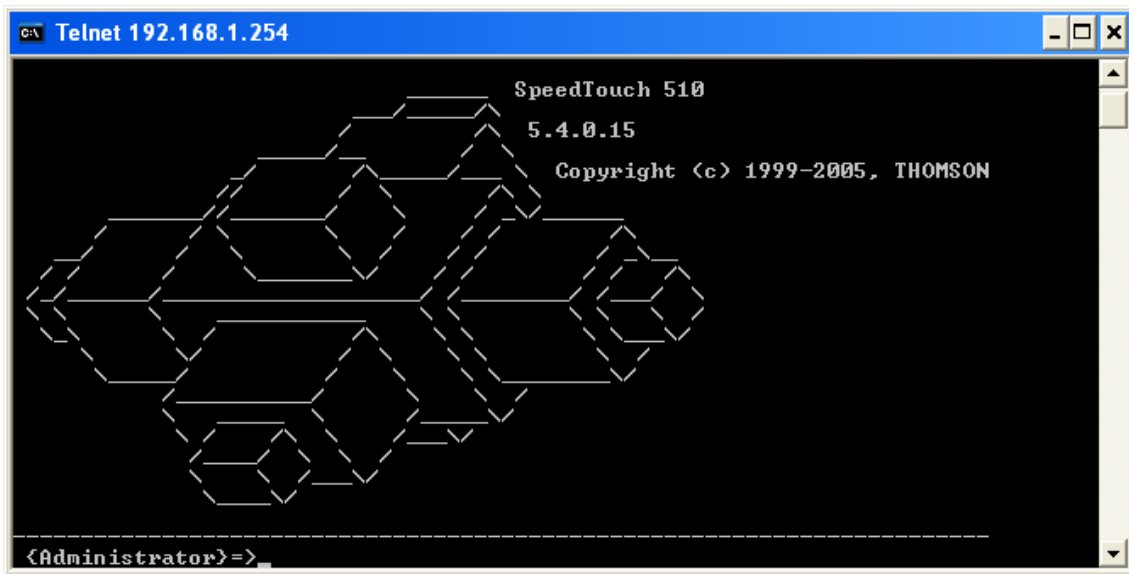


**Digite "dns server route flush" e pressione enter.**

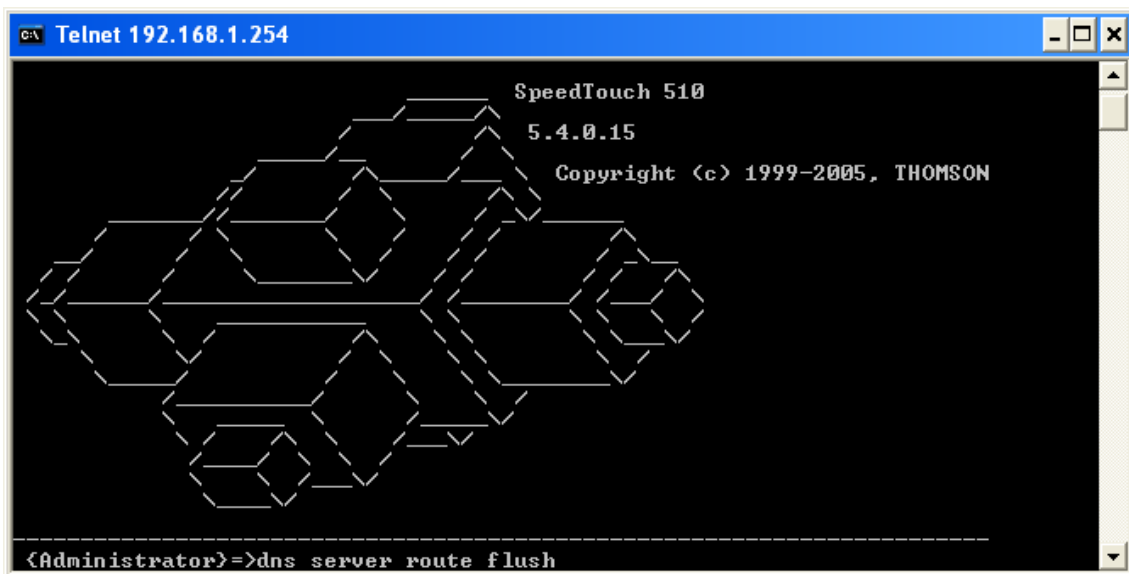

**Digite "dns server route add dns=xxx.xxx.xxx.xxx metric=1 intf=Internet" e pressione enter. Caso voce queira adicionar mais de 1 DNS basta repetir o comando.**


**No campo dns preencha com o endereço DNS ex: 200.204.0.10**

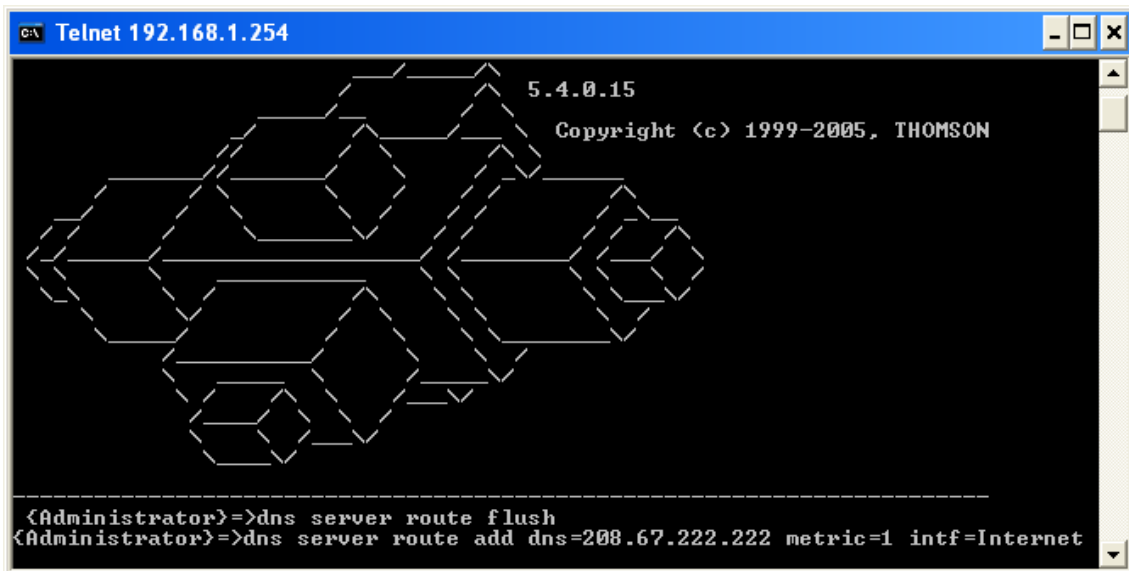

```
C:\ Telnet 192.168.1.254
5.4.0.15
Copyright (c) 1999-2005, THOMSON

-----
<Administrator>=>dns server route flush
<Administrator>=>dns server route add dns=208.67.222.222 metric=1 intf=Internet
```


**Em meu caso resolvi adicionar 2 endereços de DNS, portanto efetuei o comando acima 2 vezes.**

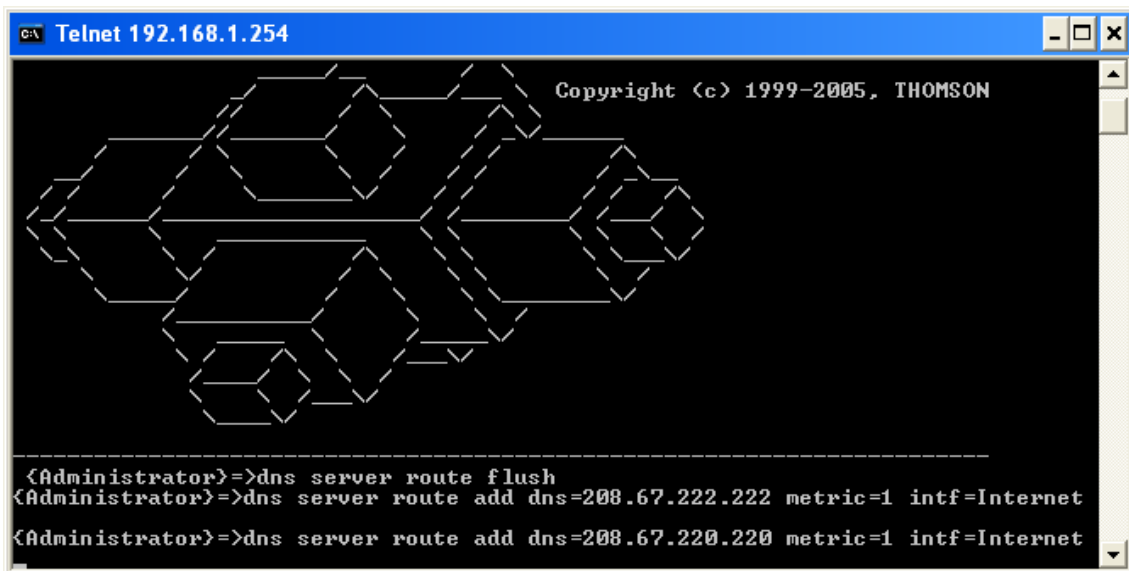

```
C:\ Telnet 192.168.1.254
Copyright (c) 1999-2005, THOMSON

-----
<Administrator>=>dns server route flush
<Administrator>=>dns server route add dns=208.67.222.222 metric=1 intf=Internet
<Administrator>=>dns server route add dns=208.67.220.220 metric=1 intf=Internet
```


**Digitare "saveall" e pressione enter.**

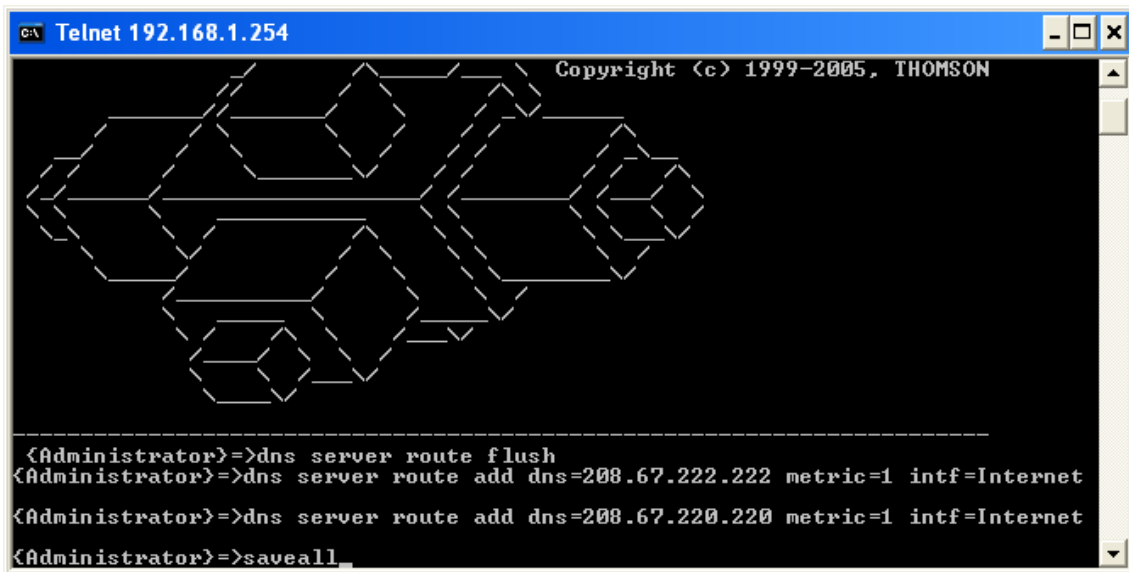

The screenshot shows a Telnet window titled "Telnet 192.168.1.254". The window contains a network diagram with several interconnected nodes and links. Below the diagram, the following commands are entered in a terminal-like interface:

```
Copyright (c) 1999-2005, THOMSON  
-----  
<Administrator>=>dns server route flush  
<Administrator>=>dns server route add dns=208.67.222.222 metric=1 intf=Internet  
<Administrator>=>dns server route add dns=208.67.220.220 metric=1 intf=Internet  
<Administrator>=>saveall_
```

**Digitare "exit" e pressione enter.**

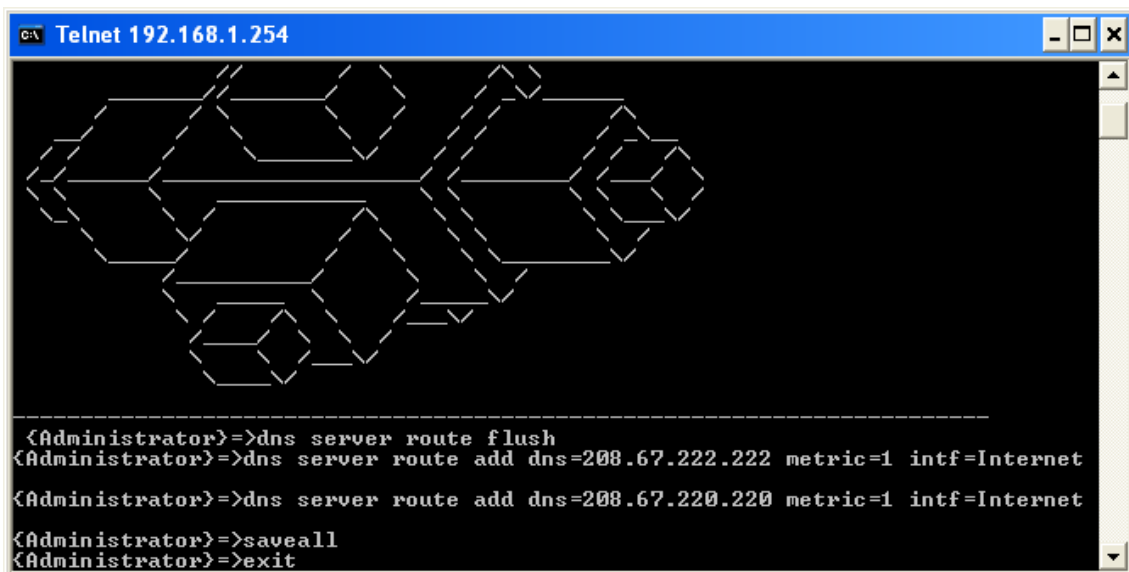

The screenshot shows the same Telnet window as above. The network diagram and previous commands are visible. The final command entered is:

```
<Administrator>=>exit
```