


Roteamento PPPoE do Gateway ST510v5 firmware 5.2.7.19.0

Abra seu navegador de Internet e na barra de endereços de seu navegador digite o endereço **http://10.0.0.138** e pressione a tecla Enter. Abrirá a tela abaixo.



The screenshot shows the Thomson SpeedTouch 510 web interface accessed via Internet Explorer. The browser window title is "SpeedTouch 510: 0542AH13R - Windows Internet Explorer". The address bar shows "http://10.0.0.138/index.htm". The page features the Thomson logo and "speedtouch™" branding. A navigation menu on the left includes "500 series", "Save All", and "Help". The main content area is titled "System Information" and contains a table with columns "Diagnostics", "Service Info", "Configuration", and "System". The table displays DSL statistics: Line Status (Enabled), Bandwidth Up/Down (704 / 2304 Kbit/sec), and Uptime (00:01:33). A warning message at the bottom states "WARNING: No password specified". The status bar at the bottom shows "Done" and "Internet".

Diagnostics	Service Info	Configuration	System
DSL		Statistics	
Line Status		Enabled	
Bandwidth Up/Down (Kbit/sec)		704 / 2304	
Uptime		00:01:33	

© THOMSON 2003. All rights reserved.

WARNING:
[No password specified](#)

Clique em "Advanced" depois em "Easy Setup"

SpeedTouch 510: 0542AH13R - Windows Internet Explorer

http://10.0.0.138/index.htm

THOMSON speedtouch™

500 series

Save All Help

- Basic
- Advanced**
 - Diagnostics
 - Easy Setup**
 - IP Addresses
 - IP Routing
 - NAPT
 - DHCP
 - DNS
 - System
 - System Password
 - Templates
 - Language

System Information

Diagnostics	Service Info	Configuration	System
DSL		Statistics	
Line Status		Enabled	
Bandwidth Up/Down (Kbit/sec)		704 / 2304	
Uptime		00:01:33	

© THOMSON 2003. All rights reserved.

WARNING:
[No password specified](#)

Clique em "Next"

The screenshot shows a web browser window with the address bar displaying "http://10.0.0.138/ - SpeedTouch 510: 0542AH13R - Windo...". The main content area features a "Welcome to the SpeedTouch™ Setup Wizard" heading. Below the heading, there is a grid of four small images: a logo with three overlapping squares (red, green, yellow), a young girl, a young boy, and a young man. To the right of these images, the text reads: "This Wizard helps you configure your SpeedTouch™ DSL router. To continue, Click Next." Below this text is the SpeedTouch logo, which consists of four colored squares (green, red, yellow, blue) above the text "speedtouch™" and the tagline "Built for excellence". At the bottom left of the main content area, there is a checkbox labeled "Don't show again." The footer of the page contains the "THOMSON MULTIMEDIA" logo on the left and three buttons: "< Back", "Next >", and "Cancel".

http://10.0.0.138/ - SpeedTouch 510: 0542AH13R - Windo...

Welcome to the SpeedTouch™ Setup Wizard

This Wizard helps you configure your SpeedTouch™ DSL router.
To continue, Click Next.

Don't show again.

THOMSON MULTIMEDIA

< Back Next > Cancel

Selecione a opção "Routed PPPoE – DHCP - NAPT" e clique em "Next"

The screenshot shows a web browser window with the address bar displaying "http://10.0.0.138/ - SpeedTouch 510: 0542AH13R - Windo...". The page title is "Service Selection" and it includes a sub-header "You need to select the service you want to connect to." Below this, there is a prompt: "Select the Service of your DSL account. Click Next to continue." A section titled "Select a service:" contains a list box with three options: "Routed PPPoE - DHCP - NAPT" (which is highlighted), "Routed PPPoA - DHCP - NAPT", and "Bridged Ethernet". Underneath, a "Description of selected service:" section shows a text area with the following content: "DESCRIPTION Routed PPPoE Packet Service configuration using always-on session connectivity." and "REGION World". At the bottom of the page, there is a "THOMSON MULTIMEDIA" logo and three buttons: "< Back", "Next >", and "Cancel".

Service Selection

You need to select the service you want to connect to.

Select the Service of your DSL account. Click Next to continue.

Select a service:

- Routed PPPoE - DHCP - NAPT
- Routed PPPoA - DHCP - NAPT
- Bridged Ethernet

Description of selected service:

DESCRIPTION Routed PPPoE Packet
Service configuration using always-on session connectivity.
REGION World

THOMSON MULTIMEDIA

< Back Next > Cancel

Selecione o VPI/VCI utilizado por sua companhia de telefonia e clique em "NEXT"

http://10.0.0.138/ - SpeedTouch 510: 0542AH13R - Windo...

Routed PPPoE Packet Service

Specify the details of the Routed PPPoE Packet Service. All information should be provided by your ISP.

VPI/VCI Choose a VPI/VCI from the list

Auto-configured

THOMSON MULTI MEDIA

< Back Next > Cancel

Preencha o campo "User Name" com seu e-mail e campo "Password" com a senha deste e-mail e clique em "Next"

http://10.0.0.138/ - SpeedTouch 510: 0542AH13R - Windo...

PPP Account Settings

Specify the details of the Routed PPP Account. All information should be provided by your ISP.

User Name
Enter your Internet connection user name.

Password
Enter your Internet connection password.


Access Concentrator
Enter the PPPoE Access Concentrator Name.

Service Name
Enter the PPPoE Service Name.

THOMSON MULTIMEDIA


< Back Next > Cancel

Caso voce queira definir um usuário e senha para impedir o acesso indesejado a interface de configuração do SpeedTouch preencha os campos abaixo e clique em "Next", caso contrário somente clique em "Next"

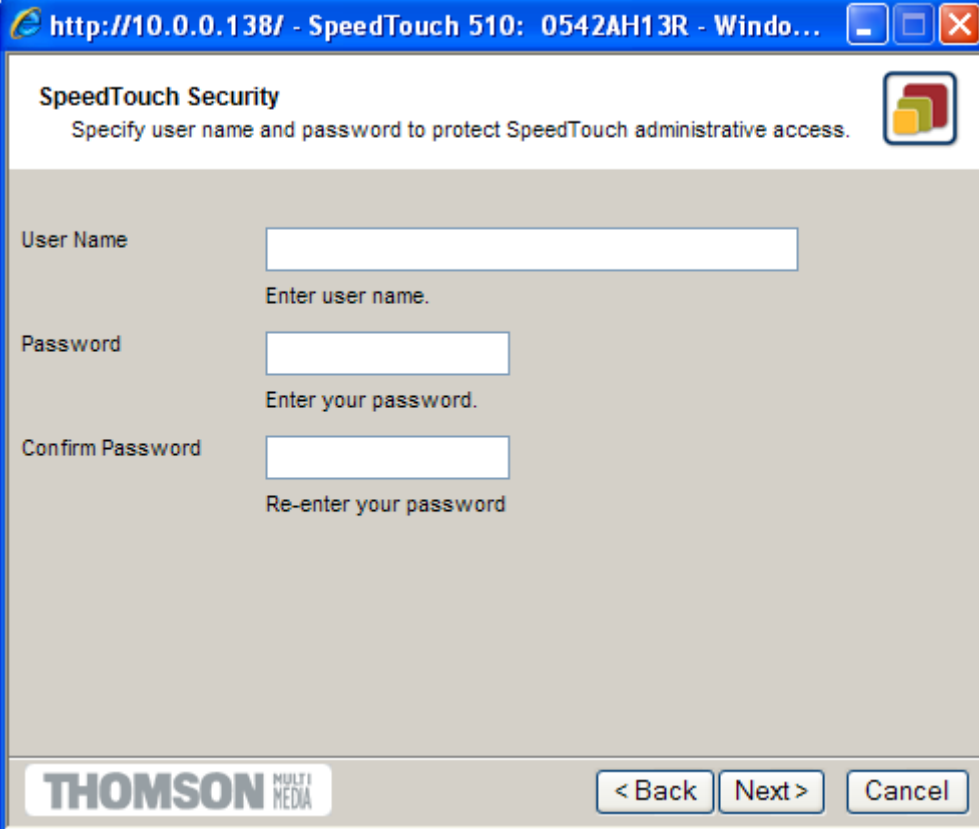

The image shows a web browser window with the address bar displaying "http://10.0.0.138/ - SpeedTouch 510: 0542AH13R - Windo...". The main content area is titled "SpeedTouch Security" and contains the instruction "Specify user name and password to protect SpeedTouch administrative access." Below this, there are three input fields: "User Name" with the prompt "Enter user name.", "Password" with the prompt "Enter your password.", and "Confirm Password" with the prompt "Re-enter your password". At the bottom of the window, there is a "THOMSON MULTIMEDIA" logo on the left and three buttons: "< Back", "Next >", and "Cancel".

Clique em "Start"

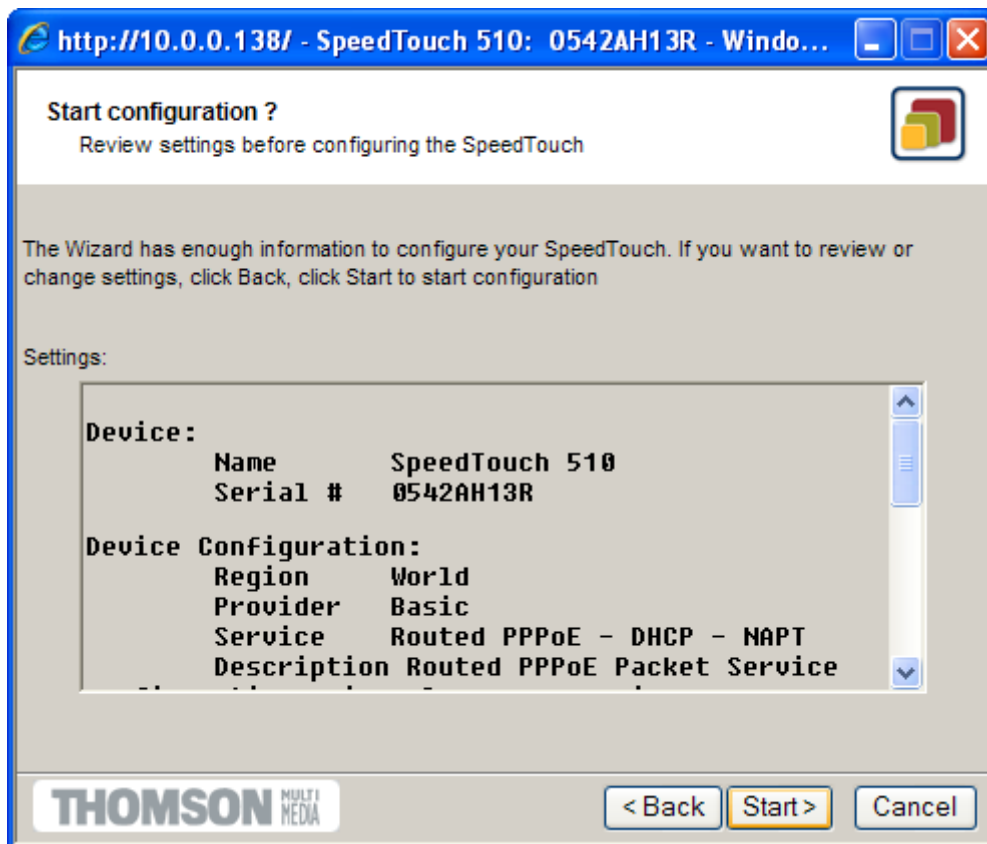

Aguarde...

http://10.0.0.138/(1,4,0,2151528440,0,1)&pppoe.tpl&us...

Configuring your SpeedTouch™

Please wait

speedtouch™
Built for excellence

THOMSON MULTI MEDIA

Clique em "Finish". Pronto seu modem está roteado.

